

Safety That Doesn't Impede Production


SAMSON Self-contained Hydraulic Unit




- NPS 1 to 12 RF and RTJ flanged
ANSI Class 150 to 2500
- NACE compliant and API 6D certified
- Fire safe tested and certified
- ISO 15848 Rate B and Shell TAMAP
2-STAR and 77/300 fugitive emission
qualification and certification

Optional construction

- API 6A 5000 and 10,000

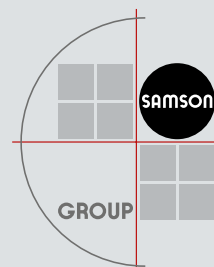

It's the little things that lead to more uptime and less maintenance costs

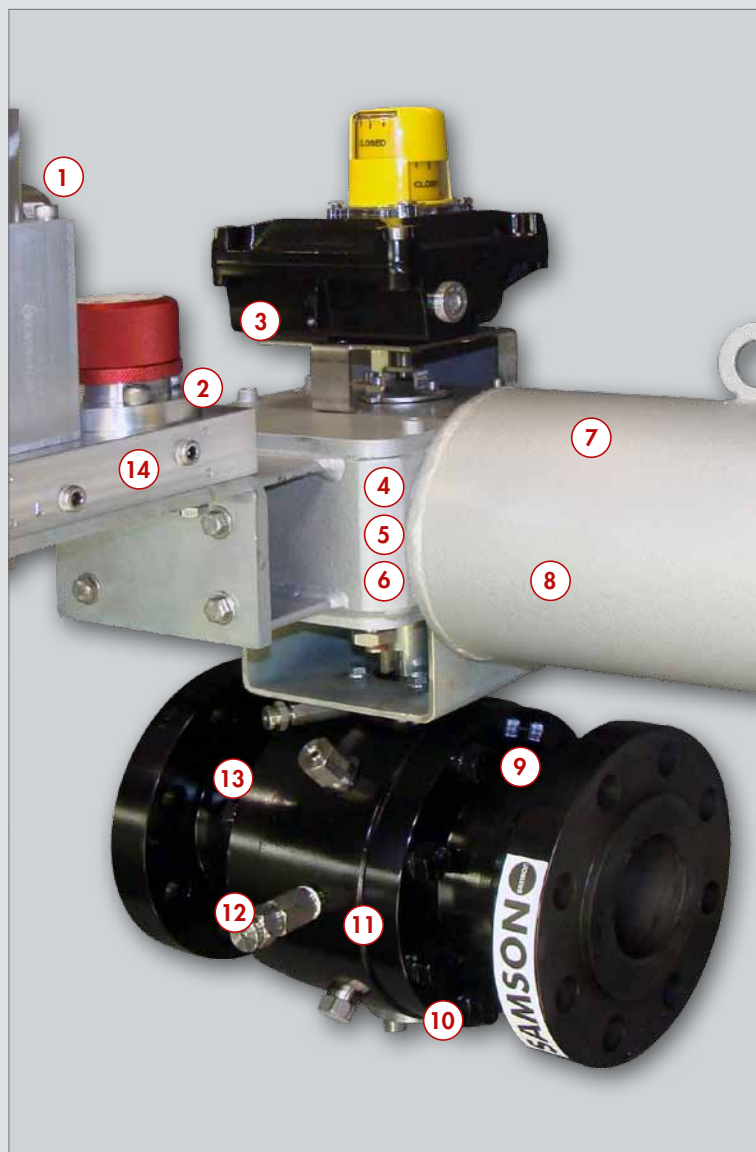

1. All wetted pump parts made of stainless steel or aluminium
2. Stainless steel pump bolting
3. Stainless steel brackets to mount accessories
4. All-steel scotch yoke actuator
5. Energized PTFE piston seal
6. ENP-coated cylinder
7. Totally enclosed, fully welded spring container with epoxy-coated spring
8. Actuator rated for -60°C
9. Devlon[®] or PEEK seats
10. 316SS or duplex ball, stem, trunnion and seat holders
11. Elast-O-Lion[®] high-performance seals are AED for high CO_2 and H_2S
12. 316SS body fittings and triple check injectors
13. SPE and DPE-style double block and bleed
14. Zinc-plated brackets

SAMSON - providing the best total cost of ownership



SAMSON CONTROLS INC.
1-105 Riviera Drive · Markham, Ontario L3R 5J7, Canada
Phone: (905) 474-0354 · Fax: (905) 474-0998
Internet: www.samsoncontrols.com
SAMSON GROUP www.samsongroup.net

SAMSON CONTROLS INC.
Branch Office · #112, 2121 Premier Way
SHERWOOD PARK, ALBERTA T8H 0B8
Phone: (780) 464-3338 · Fax: (780) 464-9998
SAMSON GROUP www.samsongroup.net